




Elektro-lančano vitlo SEK



Elektro-lančana vitla serije SEK
za terete do 2t



SEK elektro-lančano vitlo idealno u kombinaciji sa stupnom konzolnom dizalicom

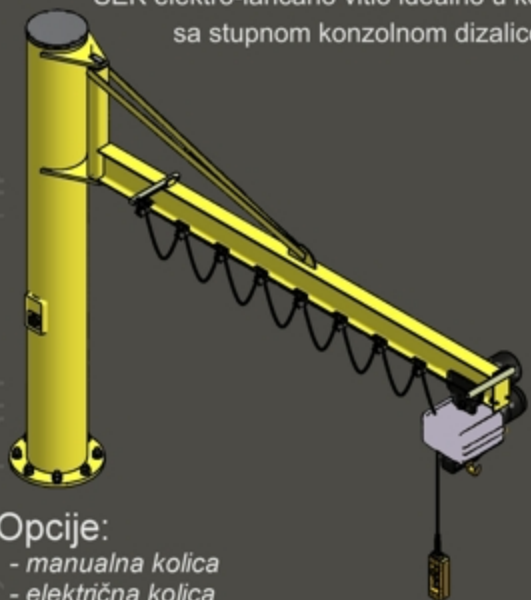

Opcije:

- manualna kolica
- električna kolica
- druge visine dizanja
- daljinsko / radijsko upravljanje



Telecrane
daljinsko / radijsko upravljanje



U kombinaciji sa sredstvima za prihvat tereta







Permanentni magnetni hvatač

Hvataljke za pločevinu



SEK seriju elektrolančanih vitala odlikuju visoko učinkoviti motori integrirani u kompaktno i robusno kućište. Dugi servisni intervali, pouzdan pogon, niski troškovi održavanja, a ujedno jednostavno rukovanje i ugradnja osnovne su prednosti ovog modela. Dokazana Europska kvaliteta, izvedba teretne kuke po DIN-u sa osiguračem, DAT 80 razred teretnog lanca. Kućište vitla zaštićeno je masivnim gumenim odbojnikom od udara kuke. Klizna spojka limitira krajnji položaj kuke i maksimalnu nosivost. Vitlo se isporučuje u tri osnovne varijante: fiksna izvedba, izvedba sa manualnim kolicima i kolica sa električnim pogonom.



Teret kg	Model OH	Lanac	C	L1	L2	BC	BC1	BC2	B1			
		mm	mm	mm	mm	mm	mm	mm	mm			
250	SEKa 040.11	6x18	399	238	290	496	165	150	137			
500	SEKa 040.11	6x18	399	238	290	496	165	150	137			
1.000	SEKb 040.11	8x24	486	275	353	548	198	150	153			
2.000	SEKb 080.21	8x24	570	275	353	548	237	180	117			

Teret kg	Model FND	Lanac	C	L1	L2	BC	BC1	BC2	B1	B2	F	H
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
250	SEKa 040.11	6x18	461	238	290	558	165	150	137	206	50-310	66
500	SEKa 040.11	6x18	461	238	290	558	165	150	137	206	50-310	66
1.000	SEKb 040.11	8x24	598	275	353	630	198	150	153	242	65-310	76
2.000	SEKb 080.21	8x24	667	275	353	645	237	180	117	288	65-310	92

Teret kg	Model FNE	Lanac	C	L1	L2	L3	BC	BC1	BC2	B1	B2	F	H
		mm	mm	mm	mm	m	mm	mm	mm	mm	mm	mm	mm
250	SEKa 040.11	6x18	403	238	290	339	500	165	150	137	281	55-310	117
500	SEKa 040.11	6x18	403	238	290	339	500	165	150	137	281	55-310	117
1.000	SEKb 040.11	8x24	467	275	353	339	529	198	150	153	281	55-310	117
2.000	SEKb 080.21	8x24	573	275	353	339	551	237	180	117	320	55-310	126




INDENNA
SWF

www.indenna-impuls.hr

INDENNA-IMPULS d.o.o.

Žitnjak b.b., 10000 Zagreb HR
Tel./fax.: +385 (0)1 2406 235
GSM: +385 (0)98 9139 664
e-mail: indenna-impuls@zg.t-com.hr
web: www.indenna-impuls.hr



Indenna-Dvigala d.o.o. : Ljubljana - SLO

Indenna-Impuls d.o.o. : Zagreb - HR

Indenna-Dizalice d.o.o. : Gračanica - BiH

Indenna-Kran d.o.o. : Beograd - SRB

Indenna-Skopje d.o.o. : Skopje - MK

Standardna izvedba:


- jednobrzinski motor dizanja
- sklopna tehnika
- viseća upravljačka komanda sa nužnom "STOP" funkcijom
- polietilenski ekstrudirani spremnik za lanac
- 3 m visina dizanja
- klizna spojka
- gornja kuka
- IP55 zaštita
- površinska zaštita: praškasti premaz, smolski epoksidni poliester 70 mikrona
- kočione obloge bez primjene azbesta

INDUSTRIJSKE DIZALICE

Generalna zastupstva:




www.swfkranteknik.com



www.akapp.com

TELECRANE

www.telecrane.it



www.huchez.fr

